

MSP 225

HDMI to H.264 Mini Converter



Key Features

- 1U Frame
- HDMI 1.3 Input
- H.264 Output
- Controlled by USB


Specification

Connectors	Inputs	2 × HDMI (HDMI-A)	
	Outputs	2 × H.264 (RJ45)	
	Remote Control	USB	
	Power	5.4mm DC Socket	
Performance	Input Resolution	VESA:	1024x768x60/75/85 1280x800x60 1280x1024x60/75/85 1360x768x60 1366x768x60 1400x1050x60 1440x900x60 1600x1200x60 1680x1050x60 1920x1080x60
		SMPTE:	480i60 576i50 720P50/59.94/60 1080i50/59.94/60 1080P25/29.97/30/50/59.94/60
	Output Resolution		176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x384 480x480 544x480 608x448 640x360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080
		Refresh Rates	10~60FPS
Supported Standard	HDMI	1.3	
	H.264	H.264/MPEG-4 AVC	
Encoding Protocols	H.264 baseline/main/high profile L4.2 MJPEG/JPEG baseline		
Power	Input Voltage	12V DC (via universal Plug Pack)	
	Max Power	1A	
Environment	Temperature	0°C~45°C	
	Humidity	10%~85%	
Physical	Weight	0.27kg (Net Weight)	
	Dimensions	98mm x 92.9mm x 44mm (Device Dimension)	

Order Codes

Product Code	Item
600-0225-01-1	HDMI to H.264 Convertor

Dimensions

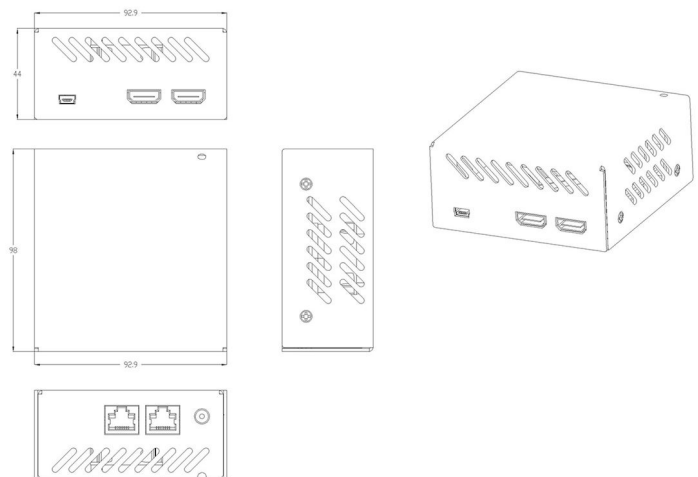

RGBlink™

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgblink.com http://www.rgblink.com
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C

Specifications are correct at time of printing and subject to change or alteration without notice.

