



Key Features

- LED display controller
- Load capacity up to 1.31m pixels
- Each LAN port supports width up to 3840,height up to 1920
- Support custom resolutions
- Prestore multi sets of receiver parameters
- Connect image of different screen via one click
- Support color space switch and improve image consistency
- Data calibration,dual backup and restoration
- File readback and backup
- Dual ethernet hot backup
- Ethernet error code detection
- Support for splicing freely


Specification

Connectors	Input	DVI	1×DVI
	Output	SubitoNX	2×RJ45
	Audio	Audio In	1×3.5mm audio jack
	Communication	USB	1×USB-B
Performance	Input Resolution	DVI VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60
	Output Resolution	SubitoNX VESA	1280×1024@60 1024×1200@60 1920×712@60 2048×668@60 3840×340@60
	SubitoNX Sender	RJ45(each port) Capacity Horizontal Range Vertical Range	1.31m pixels 3840 pixels 1920 pixels
Power	Input Voltage	DC 3.6 ~ 12V/0.6A	
	Max Power	3.0W	
Environment	Temperature	-20℃ ~ 70℃	
	Humidity	0% ~ 65%	
Physical	Weight	0.5kg	
	Dimension	178.6mm×167.4mm×39.1mm	

Application



Dimension

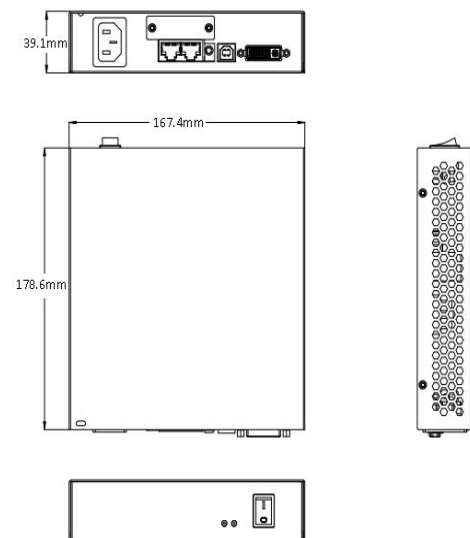

Order Codes

Product Code	Item
880-1002-01-0	SubitoNX S2 Sender Box

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

