RGBCTL-PTZ-BK PTZ Camera Controller



Key Features

- Multipel control and network protocol
- LCD screen on front panel with key tone
- Control code modified by customers
- Camera speed control via joystick
- Camera parameter s adjustment via keys
- Multiple control connectors ,up to 255 cameras
- Support PoE


Specification

Connectors	Communication	RS232	1×DB15	
		RS422 (RS485)	1×5Pin Terminal	
		LAN	1×RJ45	
Performance	Control Protocol	VISCA Pelco-D Pelco-P		
	Network Protocol	ONVIF VISCA		
	Baud Rate(dps)	2400 4800 9600 19200 38400 115200		
	Display	LCD Screen		
	Key Tone	ON/OFF		
	Joystick	Four dimensions (control:	up, down, left, right, zoom, rotation)	
	Upgrade	WEB upgrade		
	Input Voltage	DC12V		
	Max Power	0.6W		
Environment	Temperature	0°C∼50°C		
	Humidity	0%~90%		
Physical	Dimension	320mm×180mm×100mm		

Order Code

Product Code	Item	
981-1000-03-0	RGBCTL-PTZ-BK PTZ Camera Controller	

Dimension

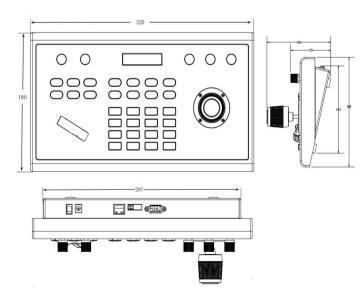

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



