

ASK pro




Key Features

- Set contains an ASK mini 4K Receiver and two ASK me 2K Transmitters
- Share, Project Cast from any device
- Support 4K display for collaboration & sharing
- Latency as low as 100ms
- 64bit Quad Core CPU, multi core GPU, 2.4G+5G wireless, 802.11b/g/n/ac WIFI and especially 802.11 AC 2T2R WIFI MIMO with 2x2 internal antenna.
- Up to 128 connected users
- Share up to 4 screens simultaneously
- Zero Configuration for computers
- Link up to ten ASK Receivers
- Compatible with all OS platforms including Windows, macOS and Linux
- Share wirelessly from mobile and other devices with MiraCast or AirPlay
- Support white board function
- Simple touch control to share from ASK Transmitter
- ASK Receiver includes built-in Whiteboard feature
- HDMI 2.0 and HDCP 2.2 Compliant
- Convenient mounting and storage features

Application Diagram



Dimension

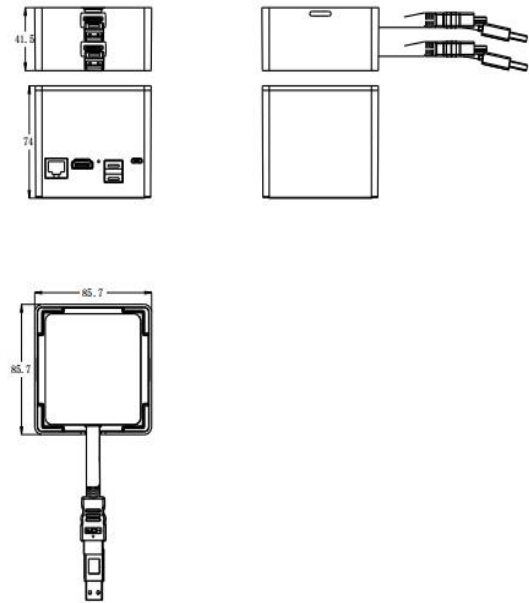

Order Codes

Product Code	Item
450-0001-01-0	ASK mini 4K (RX)
450-0101-01-0	ASK me 2K (TX)
450-1001-01-0	ASK pro Meet Set (TX*2+ RX*1)
450-1001-02-0	ASK pro Starter Set (TX*1+ RX*1)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgbink.com



Specification

Receiver

Connectors	Output	HDMI 2.0	1×HDMI-A	
	Communication	LAN	1×RJ45	
		USB	2×USB-A	
	Power	USB	1×micro USB	
Performance	Output Resolutions	HDMI	<i>Subject to native resolution of display connected</i>	
		VESA	1280×720@60 1920×1080@60 3840×2160@60	
	Supported Standards	HDMI	2.0	
Power	Input Voltage	DC 5V/2A		
	Max Power	10W		
Environment	Temperature	-0°C~70°C		
	Humidity	10%~85%		
Physical	Weight	Net	0.3kg	
		Packaged	1.15kg (Set with 2 TX)	
	Dimension	Net	85mm×85mm×73.5mm	
		Packaged	164mm×197mm×114mm (Set with 2 TX)	

Transmitter

Connectors	Input	HDMI 1.3 (on cable)	1×HDMI-A	
	Power	USB (on cable)	1×USB-A	
Performance	Output Resolutions	HDMI		
		VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×960@60 1280×1024@60 1400×1050@60 1600×1200@60 1920×1080@60	
	Supported Standards	HDMI	1.3	
Power	Input Voltage	DC 5V/500mA		
	Max Power	2.5W		
Environment	Temperature	-0°C~70°C		
	Humidity	10%~85%		
Physical	Weight	Net	0.1kg	
		Packaged	1.15kg (Set with 2 TX)	
	Dimension	Net	70mm×73mm×16mm (without cable)	
		Packaged	164mm×197mm×114mm(Set with 2 TX)	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgblink.com

