

12G-SDI Input Module



Key Features

- Single-link 12G SDI, Dual-link 6G SDI or Quad-link 3G SDI
- Support resolution up to 2160p@60
- Backward compatible with 3G/HD/SD SDI
- Hot swappable into X3/X7 devices


Specification

Connectors	Input	4xBNC
Performance	Input Resolutions	SMPTE 480i 576i 720p@25/30/50/60Hz 1080i@50/50.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60
	Supported Standard	SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI, MADI
Physical	Weight	0.2kg
	Dimension	216mm×220mm×20mm

Order Codes

Product Code	Item
190-0003-17-0	12G-SDI Input Module

Dimensions

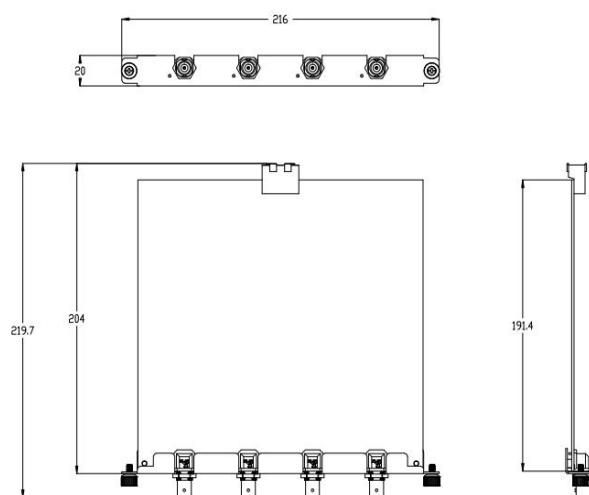

Compatibility

This module may be used in the following products

Product Code	Item
310-1003-11-0	X3P
310-0003-16-0	X3e
310-0003-01-0	X3 Touch
310-0003-15-0	X3
310-0007-00-0	X7

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgbink.com

