


ARO Rotation Module

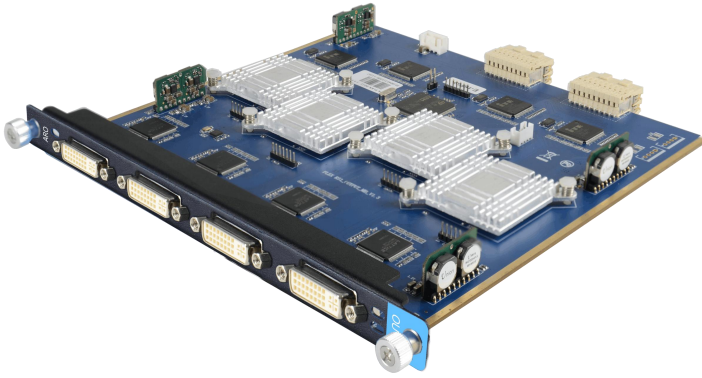

Key Features

- Rotate, Blending and Splicing , Matrix modes
- Rotate mode
 - Rotate each output independantly in 1 degree increments
 - Position output in pixel space
 - Support for multi-pitch with zoom/scale
 - Independent and arbitrary rotation for DVI signals
- Blending mode
 - Apply variable edge blending across the 4 outputs in any arrangement
- Videowall Splicing
 - Create video walls up to 8Kx1K
- Matrix
 - Each output resolution independent


Specification

Connectors	Output	4×DVI-I
Performance	Output Resolutions	Standard or User-Defined DVI SMPTE 720P@50/59.94/60 1080P@23.98/24/25/29.97/30/50/59.94/60 VESA 800×600@60 1024×768@60/75/85 1280×720@50/59.94/60 1280×800@60 1400×1050@60 1600×1200@60 1920×1080@23.98/24/25/29.97/30/50/59.94/60
	Supported Standard	DVI Single Link
	Physical	Weight
	Dimension	216mm×204mm×20mm

Order Codes

Product Code	Item
190-0003-28-0	ARO Rotation Module

Dimensions

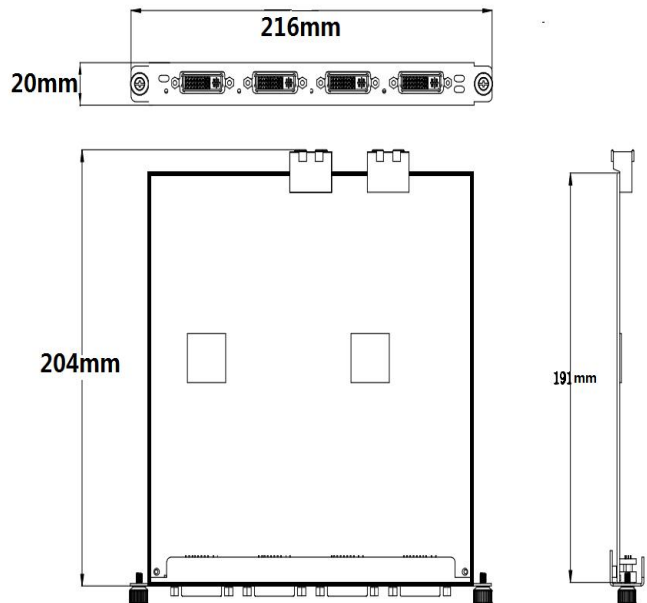

Compatibility

This module may be used in the following products

Product Code	Item
310-1003-11-0	X3P
310-0003-16-0	X3e
310-0003-01-0	X3 Touch
310-0003-15-0	X3
310-0007-00-1	X7

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

