

4K@60 Input Module



Key Features

- One 4K input or four 2K inputs
- Support layer scale on input source
- EDID management
- HDCP 2.X compliant
- Brightness and Contrast adjustable
- Four 4K signals cannot work simultaneously, select one to use

Specification

Connectors	Input	Dual Link DVI	1×DVI-I
		HDMI 1.4	1×HDMI-A
		HDMI 2.0	1×HDMI-A
		DP 1.2	1×DisplayPort
Performance	Input Resolutions	DP 1.2	
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/50.94/60 1080p@ 23.94/24/25/30/50/59.94/60 2160p@23.94/24/25/30/50/59.94/60
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×1440@60 2560×1600@60 3840×2160@24/24/25/30/50/60
		HDMI 2.0	
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/50.94/60 1080p@ 23.94/24/25/30/50/59.94/60 2160p@23.94/24/25/30/50/59.94/60
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×1440@60 2560×1600@60 3840×2160@24/24/25/30/50/60
		HDMI 1.4	
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/50.94/60 1080p@ 23.94/24/25/30/50/59.94/60 2160p@23.94/24/25/30
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×1440@60 2560×1600@60 3840×2160@24/24/25/30
		DVI	
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/50.94/60 1080p@ 23.94/24/25/30/50/59.94/60 2160p@23.94/24/25/30
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×1440@60 2560×1600@60 3840×2160@24/24/25/30
	Supported Standard	HDMI	2.0 1.4
		DP	1.2
		DVI	Dual Link
Physical	Weight	0.25kg	
	Dimension	212mm×216mm×20mm	

Order Codes


Product Code	Item
190-0003-15-0	4K@60 Input Module

Compatibility

This module may be used in the following products

Product Code	Item
310-1003-11-0	X3
310-0003-16-0	X3e
310-0003-01-0	X3 Touch
310-0003-15-0	X3
310-0007-00-1	X7

Dimensions

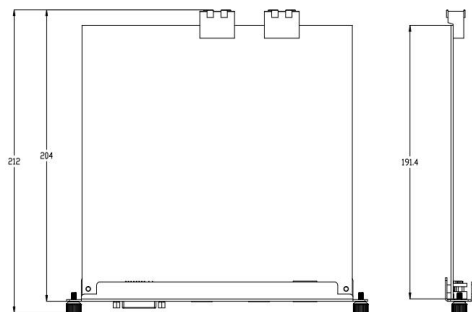

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com

