


4K HDR Input Module

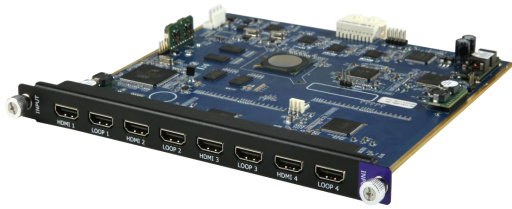

Key Features

- One 4K2K60 input or two 4K1K inputs or four 2K1K inputs
- HDR compatible
- Bitrate up to 18Gbps
- 24/30/bit RGB | YCbCr 4:4:4 input
- Configurable operation modes
 - ⊙ 4K2K
 - ⊙ 2K1K
 - ⊙ PIP
- EDID management



Specification

Connectors	Input	HDMI	4×HDMI-A
Performance	Input Resolutions	SMPTE	720p@60 1080p@60 2160p@60
		VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1366×768@60 1400×1050@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@60
	Supported Standard	HDMI	HDMI 2.0
Physical	Weight		0.3kg
	Dimension		212mm×216mm×20mm

Order Codes

Product Code	Item
190-0003-19-0	4K HDR Input Module

Dimensions

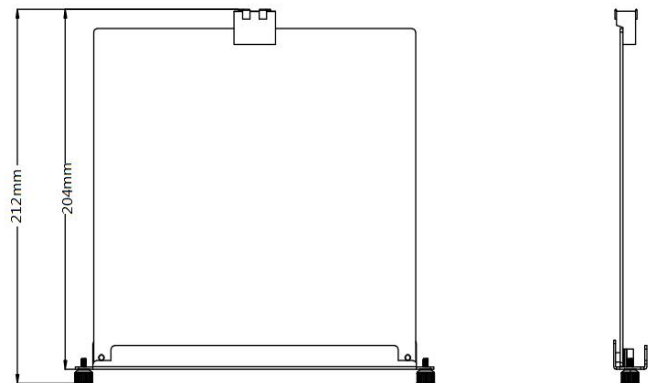

Compatibility

This module may be used in the following products

Product Code	Item
310-1003-11-0	X3p
310-0003-16-0	X3e
310-0003-01-0	X3 Touch
310-0003-15-0	X3
310-0007-00-1	X7
310-0014-00-1	X14

*** This module requires EXT Input interface to work on X14**

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

